

**"I can't see a single bubble."**

Blasogrind GTC 7



**Rico Pollak**  
Head of Grinding Technology  
Blaser Swisslube AG

**Our Liquid Tool. Your Success.**



# Fast air release for optimal cooling.

## Blasogrind GTC 7

### Peak performance grinding oil

- Performance-optimized formulation for high feed rate, long dressing intervals and excellent surface quality
- Active cobalt inhibition preventing leaching in carbide grinding
- Colourless and transparent for a clear view of the grinding process
- Odourless for a pleasant working environment

### Especially suited for tool grinding and re-grinding

- For carbide, ceramic and cermet.
- Also suited for profile and creep feed grinding

### Fast air release

- Ensures optimal cooling
- Prevents microcracks in tools
- Allows for a smaller coolant tank

### Blasogrind GTC 7



### Little foam



Shaken for 10 sec.

### No entrained air




Let stand for 10 sec.



Customary grinding oil



Lots of foam

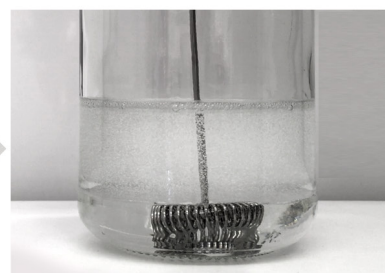

Lots of entrained air

### Product data

		Measuring method
Viscosity at 40°C	7.0 mm²/s	ISO 3104
Flash point	160°C	ISO 2592 (COC)
Copper corrosivity	1a (3h at 60°C)	ISO 2160
Colour	Colourless	ASTM 0.5

Note: Suitable for edgecap and pre-coat filters.



Our Liquid Tool. **Your Success.**